

(Ans. Dakti Sarat)

JZ 711 Bkt Damansara

No. Fail

Rajah di muka

[illegible]

JE 711 BH Daman sag


[illegible]

Penilik: JZ711 Pern Bantai Barat Tarikh: 18/11/2024
 Stn. 2 Koordinat: S1887 B4943 W.P. Kuala Lumpur
 T.R. 1 B.K. Ms.
 Tiodolit Satu bah. aras ufuk:

Waktu	Sasaran	Ufuk	Gelembong	Puguk		
	T.R.	290 00 00				
8 40	M.H.	109 13 08		66 29 28	Waktu purata	8 40 30
8 40	M.H.	108 39 00		66 23 56	Beza dari U.T. -	8 00 00
8 41	M.H.	288 40 34		293 43 35	U.T.	0 40 30
8 41	M.H.	289 17 26		293 48 47	Deklinasi -	19 17 34
	T.R.	110 00 20				
	T.R.	290 00 00				
8 42	M.H.	109 20 06		66 01 04	Waktu purata	8 42 30
8 42	M.H.	108 45 52		65 56 08	Beza dari U.T. -	8 00 00
8 43	M.H.	288 47 03		294 09 29	U.T.	0 42 30
8 43	M.H.	289 23 48		294 14 41	Deklinasi -	19 17 35
	T.R.	110 00 20				

	Set 1	Set 2
Sudut pugak	23 39 44	24 06 45
Pembetulan	- 0 01 53	- 0 01 51
Altitud	23 37 51	24 04 54
Jarak kutub	109 17 34	109 17 35
Latitud	3 09 25	3 09 25
Azimut M.H. yang dikira	112 39 48	112 46 27
Purata ke M.H.	108 57 32	109 04 12
Selisih:	3 42 16	3 42 15
Purata ke T.R.	290 00 10	290 00 10
Azimuth T.R. sebenar	293 42 26	293 42 25
Pembetulan aras	+ 0 00 00	+ 0 00 00
Tirusan	- 0 00 30	- 0 00 30
Bering grid T.R.	293 41 56	293 41 55
Purata bering grid T.R.	293 41 56	

JZ709 ijok

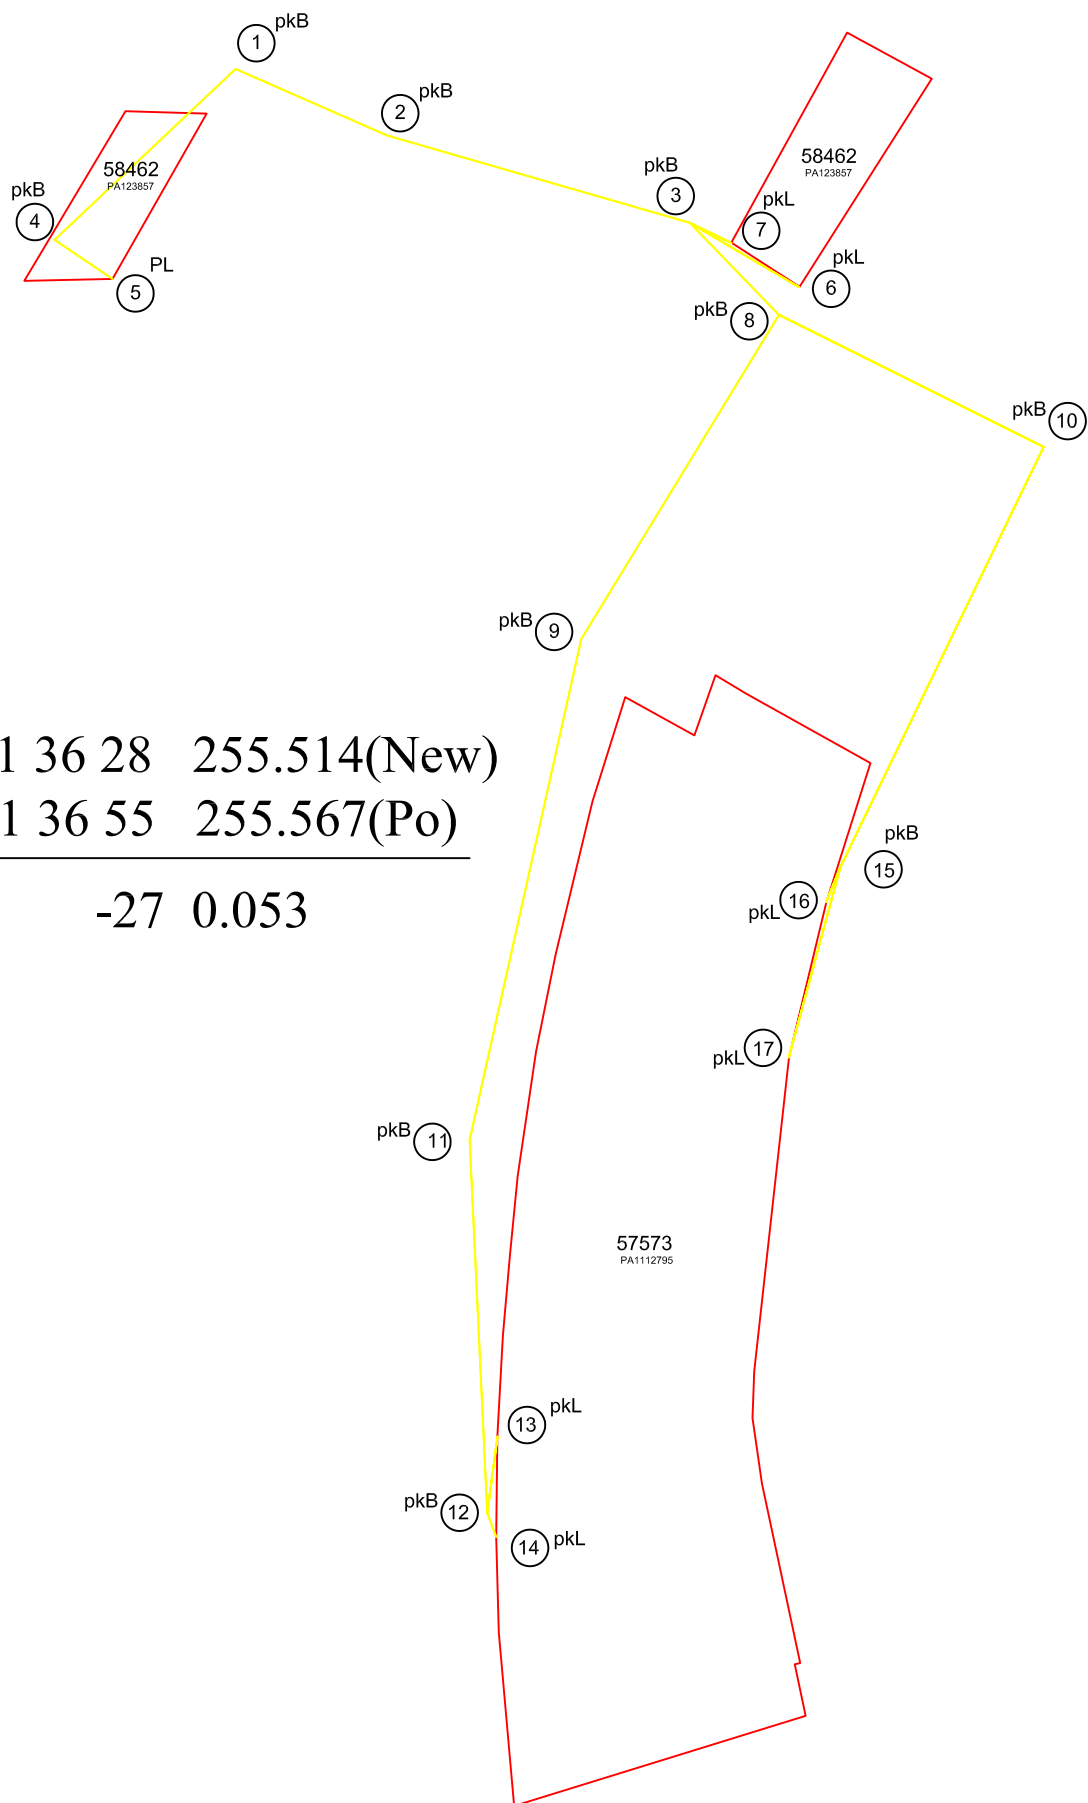

5-13	161 36 28	255.514(New)
	161 36 55	255.567(Po)
		-27 0.053